

Pro Infield "Quick Attach"

2023

**Multi Purpose
Infield Grooming &
Maintenance Machine.**
*Like Your Own Personal
Grounds Crew Built Into
One Ultimate
Machine!*

Pro Groomer Quick Attach

**Levels, Mixes, Smoothens,
Breaks Up Hard Infields, and More!**

*Quick Attach Groomers for Ultimate Convenience.
No Wheeled Frame.*

Infield Groomer
PR 72 PR 90

"Quick Attach" Pro Groomer Models

For Customers Who Need the Convenience of a Rear Direct Attach Groomer.
No other manufacturer has ever accomplished this engineering feat!



2" Receiver "Quick Attach"
Exclusive "Quick Attach".
Easy Attach and Disconnect.

2" Receiver "Quick Attach"

PR72-QR
PR90-QR

Quick Attach
"Latch & Lock"
Lift System

Standard 72" and New BigBoy 90".
Numerous Optional Attachments available.



Gator TX "Quick Attach"
Exclusive "Quick Attach" Design.
Easy Attach and Disconnect.

JD Gator TX "Quick Attach"

PR72-QX
PR90-QX

Quick Attach
"Latch & Lock"
Lift System

Standard 72" and New BigBoy 90".
Numerous Optional Attachments available.



3 Pt. Lift Cat 0 / 1

Exclusive "Adjustable 3 Pt. Lift Frame".
Use with Lower Link Arms or Quick Coupler.

3 Pt. Lift "Quick Attach"

PR72-TP
PR90-TP

Standard 72" and New BigBoy 90".
Numerous Optional Attachments available.

3 Ways to "Quick Attach"

2" Receiver "Quick Attach" with easy "Latch & Lock" Lift System.

Exclusive "Quick Attach". Easy Attach and Disconnect.

Heavy Duty Actuator

PR72-QR PR90-QR

Standard 72" and New BigBoy 90" Models.
Numerous Optional Attachments available.

Rear 72" or 90" Smoothing Broom (90" Broom Shown)

One of a Kind.

2" Receiver "Quick Attach"

66" or 84" Exclusive Leveler Implement Design.
Blades cut 100% of graded surface. (84" Leveler Shown).

PR90-QR is Shown

Direct attach behind
2 Inch Receiver **UTV's & Side by Sides**

Exclusive "Latch, Lock & Lift" System.


2-Switch Wiring System giving the user front dash and rear under box lift controls.

No Tools needed to attach or disconnect groomer. Tow System stays on the Tow Machine.


Tow System



Groomer System

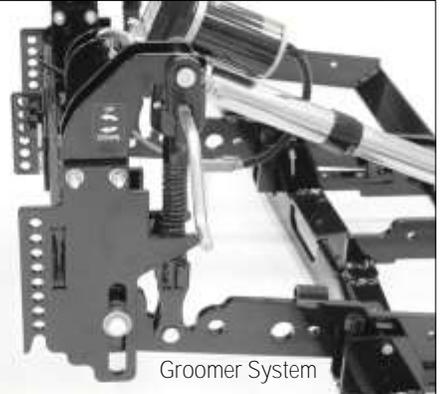

Attaches in 30 Seconds. No Tools Needed.

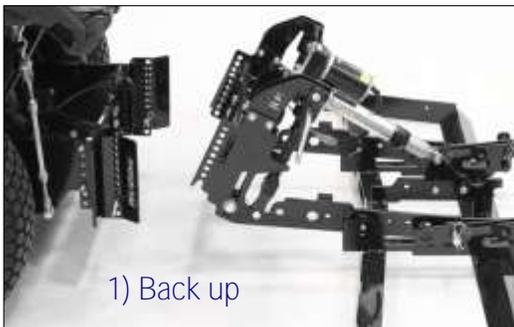

1) Back up



2) Latch & Lock



3) Lift and Go



Front Dash Mounted Switch.

includes
2 Switch Wiring System

Includes all wiring necessary and 2 Switches for Dual Control.



Rear Under Box Switch
(use when attaching and disconnecting).

TX JD Gator "Quick Attach" with easy "Latch & Lock" Lift System.

Exclusive "Quick Attach". Easy Attach and Disconnect.

Heavy Duty Actuator

PR72-OX PR90-OX

Standard 72" and New BigBoy 90" Models.
Numerous Optional Attachments available.


Rear 72" or 90" Smoothing Broom (90" Broom Shown)

One of a Kind.


JD Gator TX "Quick Attach"

66" or 84" Exclusive Leveler Implement Design.
Blades cut 100% of graded surface. (84" Leveler Shown).

PR90-OX is Shown
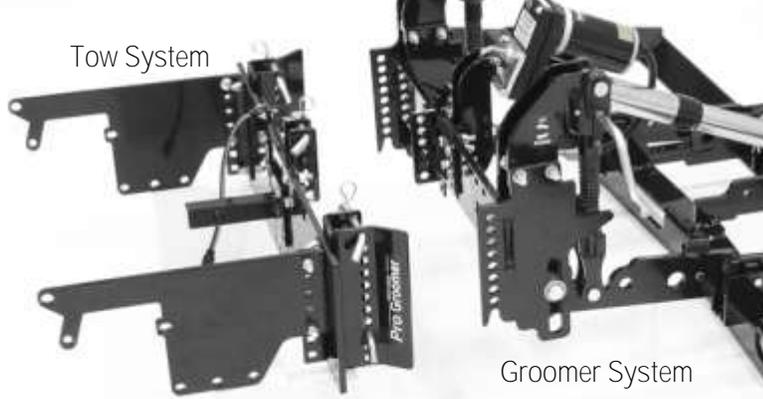
<p>Direct attach to John Deere Gator TX.</p> <p>Directly attaches to the rear axle system & 1-1/4" receiver.</p> <p>Exclusive "Latch, Lock & Lift" System.</p> <p>2-Switch Wiring System giving the user front dash and rear under box lift controls.</p> <p>No Tools needed to attach or disconnect.</p> <p>Tow System stays on the Vehicle.</p> <p><small>Note: this design connects to newer versions of Gator TX vehicles with 1-1/4" rear receiver hitch.</small></p>	 <p>Tow System</p> <p>Groomer System</p>
--	---

Attaches in 30 Seconds. No Tools Needed.

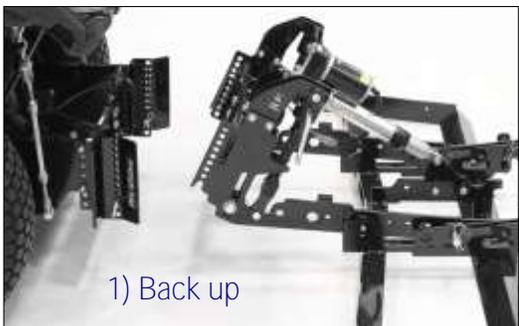 <p>1) Back up</p>	 <p>2) Latch & Lock</p>	 <p>3) Lift and Go</p>
--	---	---



Front Dash Mounted Switch.

includes
2 Switch Wiring System

Includes all wiring necessary and
2 Switches for Dual Control.



Rear Under Box Switch
(use when attaching and disconnecting).



“Adjustable 3 Pt. Lift System”




All 3 pt. lift frames (except our special design) are specific to one style of use. They force a user to decide whether or not they plan to use a tractor quick hitch (or quick coupler) or no quick coupler. In other words they do not adjust to be used either way. We've designed a 3 pt. lift frame that allows either setup. Our adjustable brackets can be moved on the frame and allow the user to decide if they want to connect directly to the link arms (no coupler) or if they want to use a quick coupler.



One of a Kind Adjustable 3 Pt. Frame.

You choose if you want to use a quick coupler or no quick coupler.

3 Point Lift. Cat 0 / 1

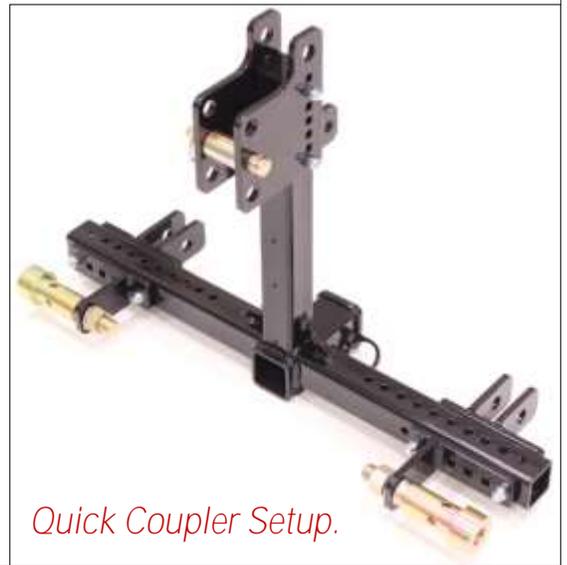

Frame has built in 2" Rear Receiver for versatility.



Turnbuckle provides groomer "pitch adjustment". Heavy Duty.


Upper brackets are adjustable to be set where user needs them.



Infields Need to be **Smooth and Level** !

Making an infield smooth is relatively easy. Leveling Infields requires advanced engineering.

Pro Groomer “Leveling Implement” Stands Apart

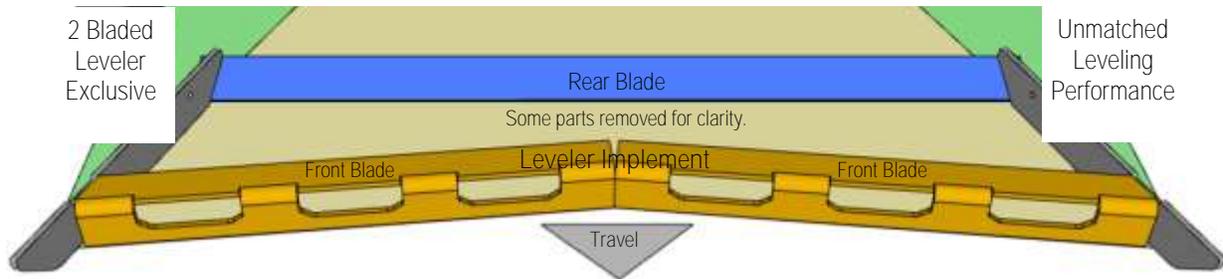

Blades cut 100% of the surface while grooming.

Unlike other machines our Pro Groomer leveling blades cut 100% of the surface. Does not leave areas un-cut.

Two Blades level better than one.

Pro Groomer Leveler Implement “Locks Into Position” to Level.


Floating Implements, such as steel drag mats, simply cannot level an infield. They might help smoothen but they ride up over high areas (don't cut it off) and sink down into low areas (tend to drag material out).

In order for an implement to level it must “Lock into Place” and not float. Our Leveler Implement travels over material and cuts high areas, carries material along, and releases it into low areas.

QR & QX Models use Front Height Adjust System. TP uses 3 Pt. Lift System.


Leveler Does Not Float. It locks in place for perfect leveling.

Front Blade height adjust system adjusts each side independently and locks into position you choose.

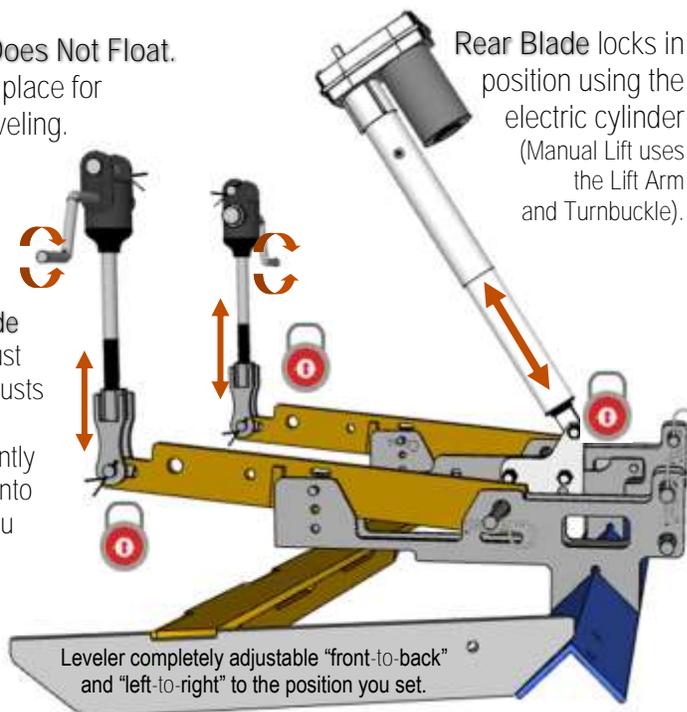

Leveler completely adjustable “front-to-back” and “left-to-right” to the position you set.

Rear Blade locks in position using the electric cylinder (Manual Lift uses the Lift Arm and Turnbuckle).

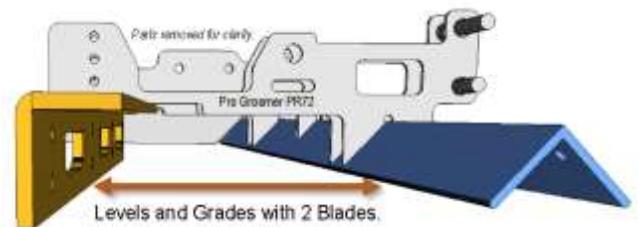


The PR72 Pro Infield Groomer is Engineered to Level.

Leveler Implement + Adjustment System produces “Level” and “Smooth” Infields.

Leveler Does Not Float! Each side of the front blade adjusts independently to keep the implement level left to right and to adjust the height of the front blade. The rear blade adjusts and locks into position using the rear electric cylinder (Manual Lift uses the Lift Arm and Turnbuckle to adjust rear blade).

Optional Accessories

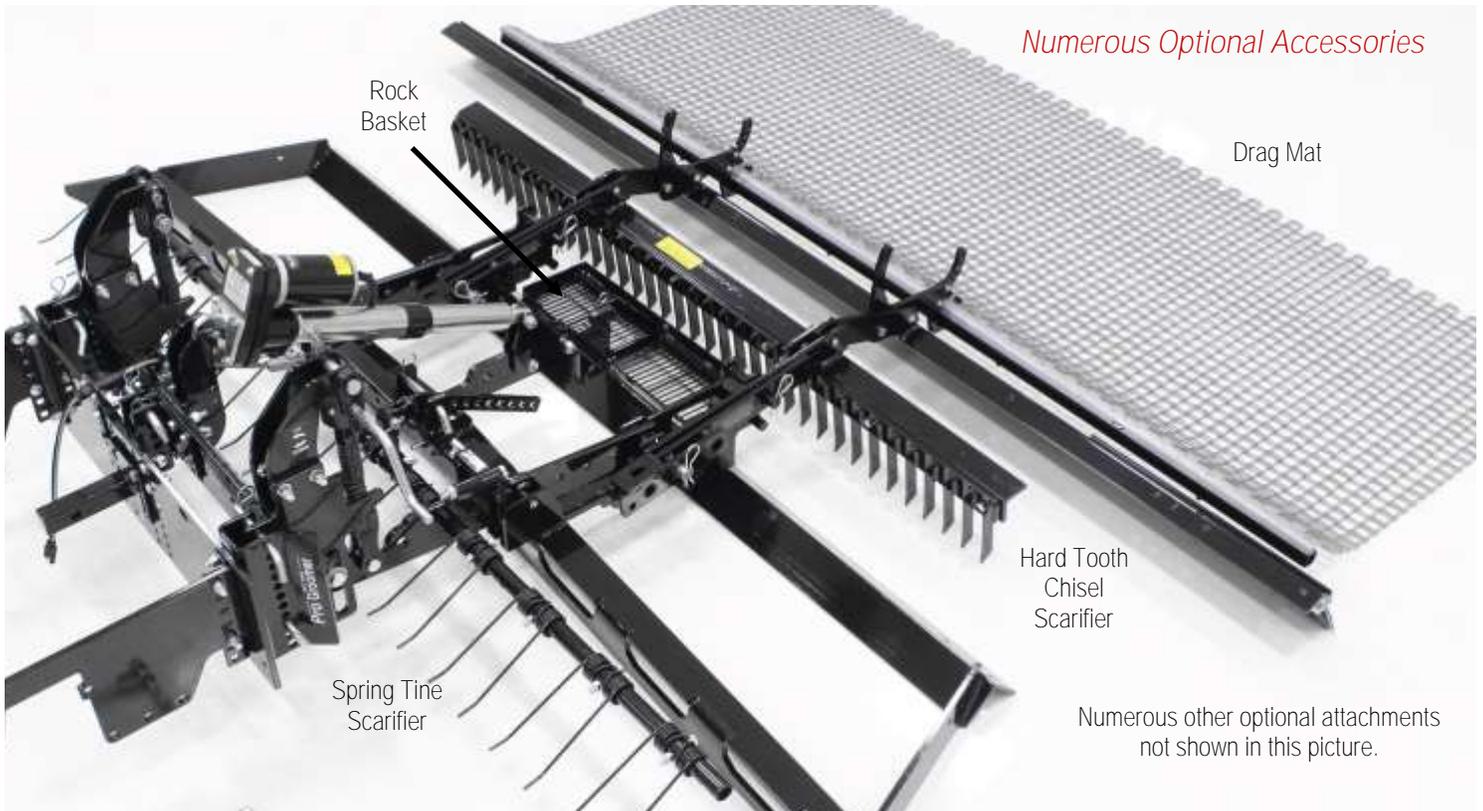

PRCH-5825 Chisel Scarifier

Chisel Scarifier.

More effective on really hard infields than the Spring Tine Scarifier. Pulverizes & shatters hard-compacted infields to improve playability. Exclusive abrasion resistant steel teeth. Completely depth adjustable. Mounts to rear of Leveler implement. Rear Broom and Drag Mat Drag can be mounted behind Chisel to help break up chunks and smoothen. Teeth are easy to replace.



In-Season. Should only be used to pulverize the very top portion of infields (1/4" to 1/2" or so) during the season.

Off-Season. Capable of depth up to 2-3/4" to mix, remove weeds, etc. but should never be used deep enough to disturb infield layers.

Chisel Scarifier cannot be used while grooming. It is a separate process. Infield layers are very important. You should never penetrate too deep into an infield and disturb the layers. If the Chisel was used while grooming then it could mask, or hide, what is actually being done to the infield. So, for infield safety, we design the Chisel Scarifier process to be a separate process from grooming.

Also see Drag Mat that helps break up chunks created by the Chisel Scarifier.



Spring Tine Scarifier (PRST-7211 PR72) (PRST-9012 PR90)

Spring Tine Scarifier.


Mounts in front of Leveler.

Completely adjustable.

Can be used while grooming - which is the only advantage it has over the chisel scarifier for pulverizing. Flexible Tines are not as effective breaking up hard infields as the hard tooth chisel. For customers who want to be able to lightly pulverize while they groom.

Includes one row of adjustable spring tines and tine adjustment system.

Note: Customers with extremely hard infields (especially infields with sand mixtures) should consider the hard tooth Chisel Scarifier which is more effective on hard infields.

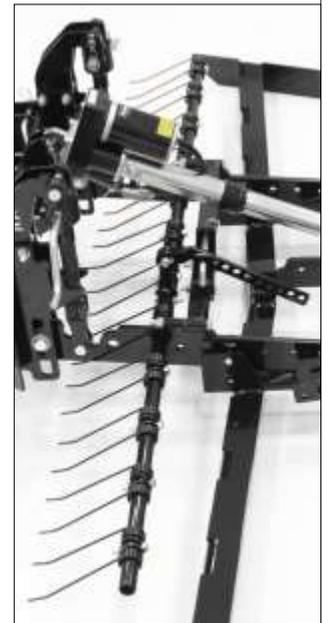



Exclusive Drag Mat Brackets pull, carry, and haul the drag mat.

Drag Mats 3 Sizes Available.

- 72" wide x 36" Deep**
- 78" wide x 36" Deep**
- 84" wide x 36" Deep**

Drag Mat Option includes our exclusive brackets that pull the mat (during use) and store the mat (rolled up) during travel off the field. No tools needed to adjust or remove the mat. Mats are most useful when breaking up hard infields (which creates chunks).


Drag Mat drops into square sections. Locked in place with flip down locks.



Mats can be adjusted left to right in 1.00" increments, in the brackets, if desired.

Roll up the drag mat and store in top of brackets for hauling.



ALDM-1000 Brackets Only	PRRB-1925	QARH-2000	QARH-0125	QAPH-0785
<p>Order this option if you wish to use your own Drag Mat in our exclusive Drag Mat Brackets.</p> <p>Brackets only. No Drag Mat included.</p> <p>Note: Our Drag Mats have a 1.00" square support tube on front pull edge to add support and so they mount correctly in our brackets. We recommend you do the same to your drag mat if you order this optional attachment.</p> 	<p>Rock Basket</p> <p>For those who have rock or debris problems in their infields.</p>  <p>Attaches behind rear blade of leveler. Material travels over rear blade and falls into basket. Debris catches in basket. Easy removal to empty.</p> 	<p>2" Receiver</p> <p>Use when groomer not attached.</p>   <p><small>Note: Due to variances of how users can arrange the Tow Plate Assembly it's possible the receiver might not be able to be left on when groomer is attached.</small></p>	<p>1-1/4" Receiver</p> <p>Use when groomer not attached.</p>   <p><small>Note: Due to variances of how users can arrange the Tow Plate Assembly it's possible the receiver might not be able to be left on when groomer is attached.</small></p>	<p>Pin Hitch (Drawbar)</p> <p>Use when groomer not attached. 7/8" Hole.</p>   <p><small>Note: Due to variances of how users can arrange the Tow Plate Assembly it's possible the pin hitch might not be able to be left on when groomer is attached.</small></p>

PRGB-7200 High Speed Grading Bar

High Speed Grading Bar

Customers choose the Pro Groomer because they want their infields level. To provide this benefit the Pro Groomer performs at optimal speeds of 4 to 5 mph. There are times however when customers need a quicker way to groom infields. Customers such as those who:

- Run all day tournaments.
- Run double headers.
- Have lots of fields to cover.

How it Works "no tools needed engineering".

Attaches to the rear of the Leveler (same way the Chisel Scarifier attaches. Store upper "non-engaged" pins (where it will not contact the infield) until you need it. Quickly moves down to the lower "engaged" pins when you need it. When engaged the HS Grading Bar will contact the infield but the 2 bladed Leveler will not. Rear Broom (and Drag Mat if you have it) attach directly to the HS Grading Bar for finishing.

Tournaments: Run tournaments with tight schedules? Groom all of infields before the day's play with the normal 2 bladed Leveler. Between games, if time is short, cut prep time with high speed implement to quickly prep infields. After the day's games groom infields with the 2 blade Leveler Implement (normal process) to bring them back to optimal condition. Double Headers: Groom infields before the first game with the normal 2 bladed Leveler. Between games, if time is short, cut prep time using high speed implement to quickly prep infields. After final game groom with the 2 blade Leveler Implement (normal process) to bring them back to optimal condition. Lots of Infields to Maintain: Some fields are groomed the normal process every day - just not all of them. Alternate between using the Leveler or the HS Grading Bar to prep infields.




HS Grading Bar also includes Brush mounted on back side for extra finish affect.



PABE-1800

Broom Extension Kit

Kit converts a 72" wide Broom to 90" wide. Adds 9.00" extension at both ends of broom. Includes extension bars, 9" frame extensions, aluminum channels, brushes and hardware.



Key Features & Benefits

- Levels - Mixes - Smoothens as you groom.
- Leveling Implement **“Locks into position to guarantee leveling takes place”**
- Completely adjustable to current infield conditions
- Cuts High Areas and Fills Low Areas
- Reduces Need for Hand Raking
- Breaks up hard infields (optional accessories)
- Maintains safer playing surface
- Deters water puddling
- Controls Weeds
- More Lift Systems to choose from than any other manufacturer (all made in the USA).
- Controls Weeds
- More Lift Systems to choose from than any other manufacturer (all made in the USA).
- Heavy Duty Steel Construction
- Powder Coated finish
- Pull with a variety of towing machines
- No tools needed to adjust engineering
- Works on all infield materials
- Built Like a Tank!
- Easy to Use
- Affordable
- Saves Labor
- We do 99% of the Assembly.
- 36 Month Limited Warranty

No Tools
Engineering!
Needed

Level & Smooth Infields!
We Guarantee It!


QA22 Rear Attach 2 Switch Control System How it Works

How it Works. This one of a kind wiring system splits 12v power from the Tow Machine battery in 2 directions:


- 1) to Dash Mounted Rocker Switch for control while driving and grooming.
- 2) to SwitchBox mounted at rear of Tow Machine for lift and lower control while attaching or unhooking the groomer.

Split power gives the user more control. If the system only had a dash mounted switch it would be difficult to attach or unhook the groomer to the quick attach system at rear. This system allows both switches to operate the cylinder (actuator) on the groomer.

Both switches send signal to the Split “Y” Harness and on to the cylinder for control. The rear “Break Away” cord is connected to the Tow Plate wire each time the groomer is attached or unhooked. It’s just like connecting trailer or camper wires to a pickup during use.

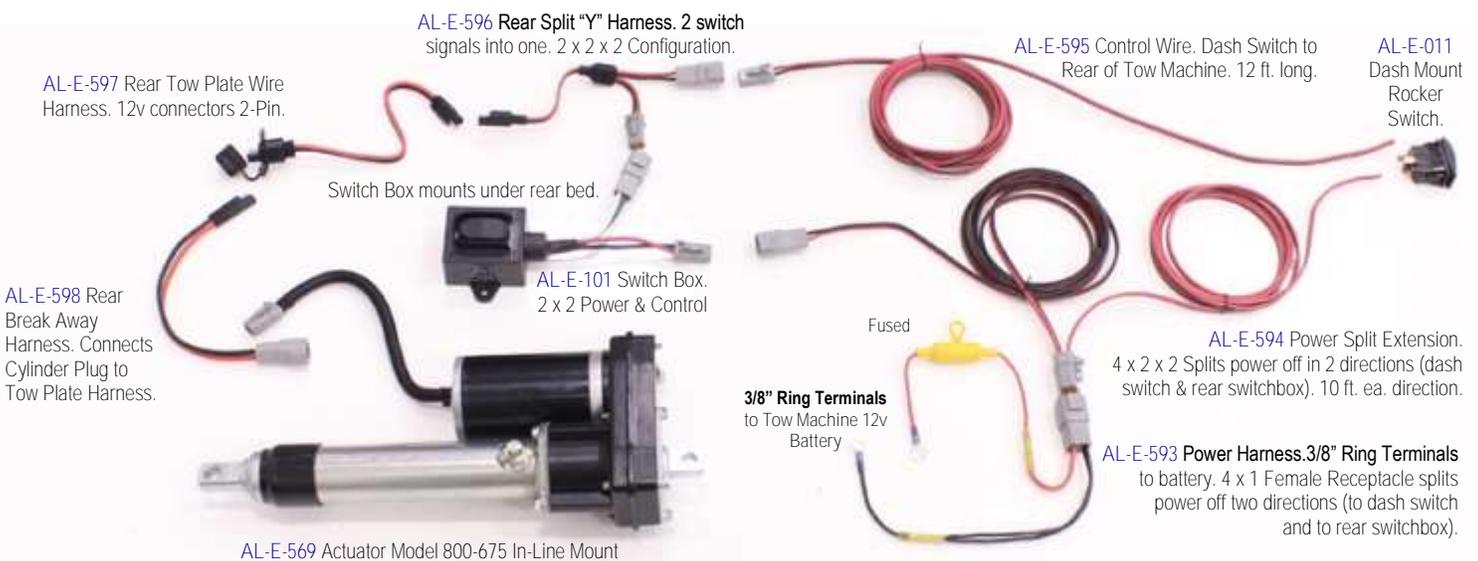


Choosing a Groomer Model

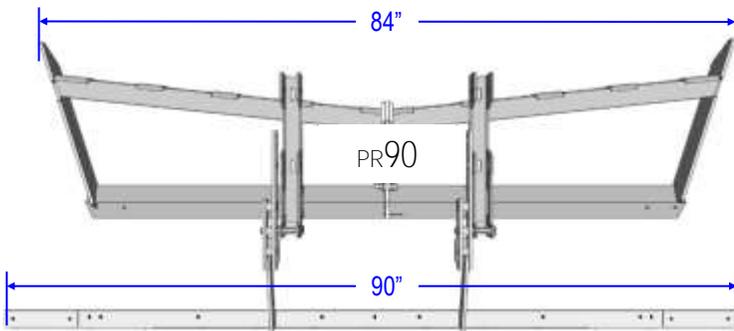

Note: Extensions (included) make broom total width 90" wide.

PR90 Pro Groomer Wider Version.
Designed for Rear Quick Attach Grooming.

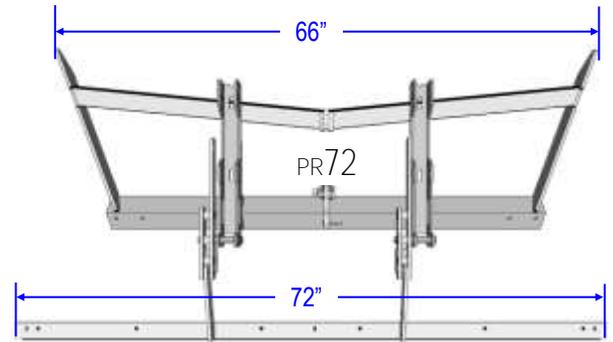


Note: Optional extensions can be added to broom ends to make it 90" wide.

PR72 Pro Groomer
Leveler and Broom Dimensions.

Direct Attach Groomers Provide Convenience. "Quick Attach" engineering maintains the versatility

you need from your tow vehicle. Groomer can be attached (or disconnected) in 30 seconds.

Driving from complex to complex, traveling city streets, roads, etc. without the need for a trailer are examples of easier travel provided by rear direct attached groomers (no wheeled frame). Customers who choose direct attach groomers tend to also choose tow vehicles that have wider and longer wheel bases than traditional tow vehicles used for infield grooming. With the addition of the PR90 model customers have more options. A wider groomer could more effectively cover wheel tracks of large tow vehicles (especially when turning). But wider groomers require larger turning radius and wider shed doors for storage.

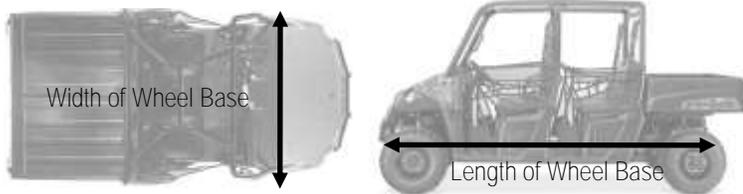

Tow Vehicles vary greatly in overall size. Length and width of wheel base do matter. We have developed the PR90 Series to more effectively cover wheel tracks of large tow vehicles (especially when turning). Tight turns should always be avoided.

Do you have baseball fields with grass in the center of the infield? If yes then a wider groomer might be a disadvantage (too wide) when grooming base paths (if you plan to groom base paths). On the other hand if your infields are all skin (no grass in the middle) then a wider groomer helps reduce field prep time.

How wide is your storage shed door? **If you plan to store the groomer inside a storage shed the PR90 Broom is 90" wide.**

You need approx. 6.00" clearance each end (12" total) to successfully enter and exit the storage door. Also note - even though the PR72 is narrower than the PR90, some PR72 customers choose to add optional broom extensions to help cover wheel tracks when turning. This essentially makes a PR72 just as wide as a PR90 (when adding broom extensions).



Convenience of Direct Attached.
Exclusive "Quick Attach" design.
Groomer connects in 30 Seconds.


No other manufacturer has achieved this engineering.



Machine Weights & Measurements Quick Attach Groomers


PR72-QR 2" Receiver Connect

Leveler 66.0" Wide
Rear Smoothing Broom 72.0" Wide
Highest Point 21.50"
Depth 56.0" (Center Hole of 2" Hitch to Rear Broom)
Depth Total 58.75" (Total Depth)
Machine Weight 275 lbs. (Standard Equipment)
Pallet Size 48 x 80
Ship Weight 352 lbs. (Standard Equipment)

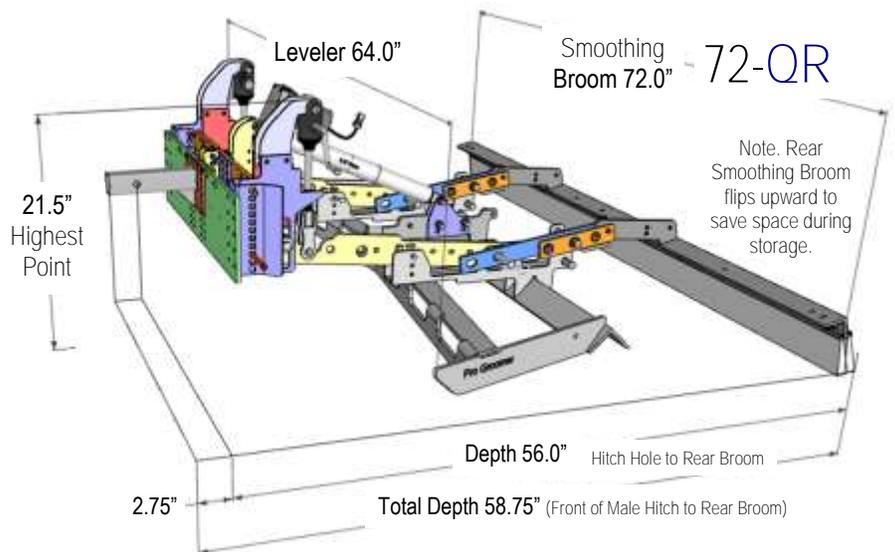

PR72-QX Gator TX Connect


Leveler 66.0" Wide
Rear Smoothing Broom 72.0" Wide
Highest Point 21.50"
Depth 53.5" (Center Hole 1-1/4" Hitch to Rear Broom)
Depth Total 65.0" (Front Brackets to Rear Broom)
Machine Weight 284 lbs. (Standard Equipment)
Pallet Size 48 x 80
Ship Weight 361 lbs. (Standard Equipment)

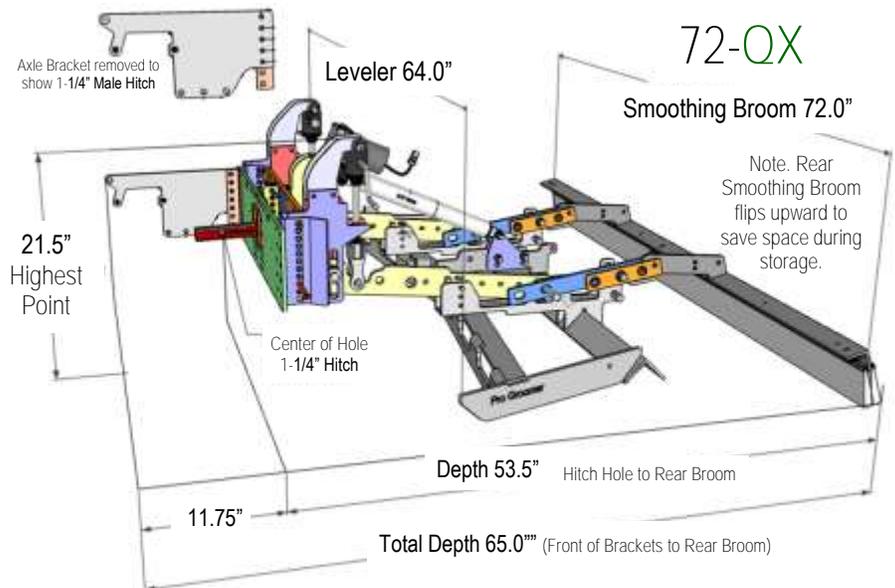

Size & Weight Specifications

PR72-TP 3 Pt. Lift Frame


Leveler 66.0" Wide
Rear Smoothing Broom 72.0" Wide
Height Adjustable 24.0" to 28.0"
Depth 48.0" (Broom also flips upward for storage).
Machine Weight 196 lbs. (Standard Equipment)
Pallet Size 42 x 80
Ship Weight 264 lbs. (Standard Equipment)

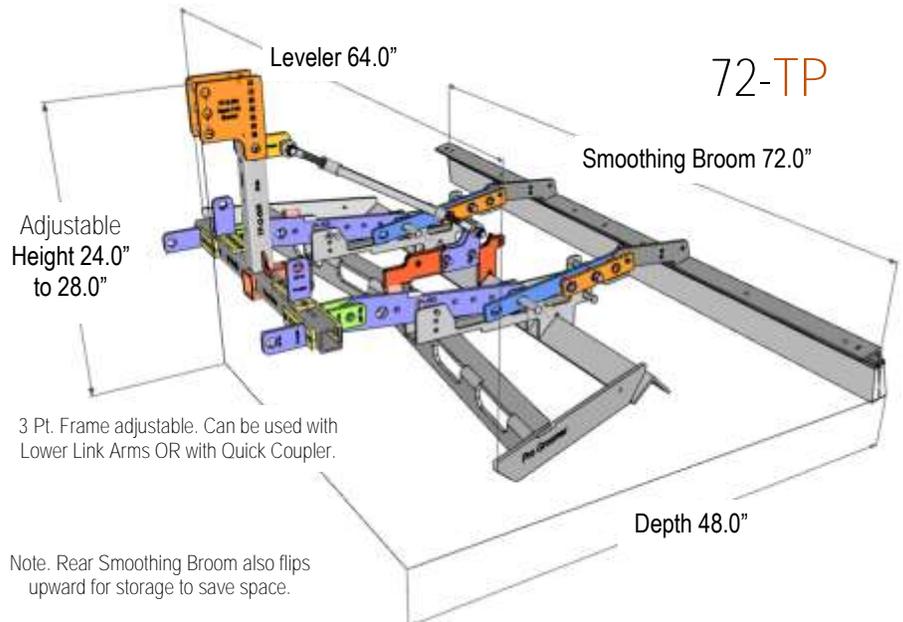

Machine Weights & Measurements Quick Attach Groomers


PR90-QR 2" Receiver Connect

Leveler 84.0" Wide
Rear Smoothing Broom 90.0" Wide
Highest Point 21.50"
Depth 56.0" (Center Hole of 2" Hitch to Rear Broom)
Depth Total 58.75" (Total Depth)
Machine Weight 300 lbs. (Standard Equipment)
Pallet Size 48 x 92
Ship Weight 387 lbs. (Standard Equipment)

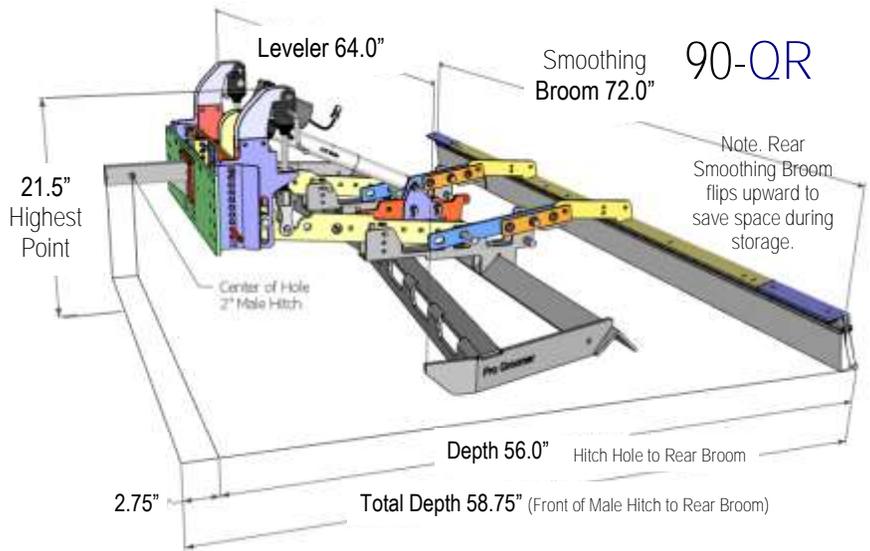

PR90-QX Gator TX Connect


Leveler 84.0" Wide
Rear Smoothing Broom 90.0" Wide
Highest Point 21.50"
Depth 53.5" (Center Hole 1-1/4" Hitch to Rear Broom)
Depth Total 65.0" (Front Brackets to Rear Broom)
Machine Weight 310 lbs. (Standard Equipment)
Pallet Size 48 x 92
Ship Weight 396 lbs. (Standard Equipment)

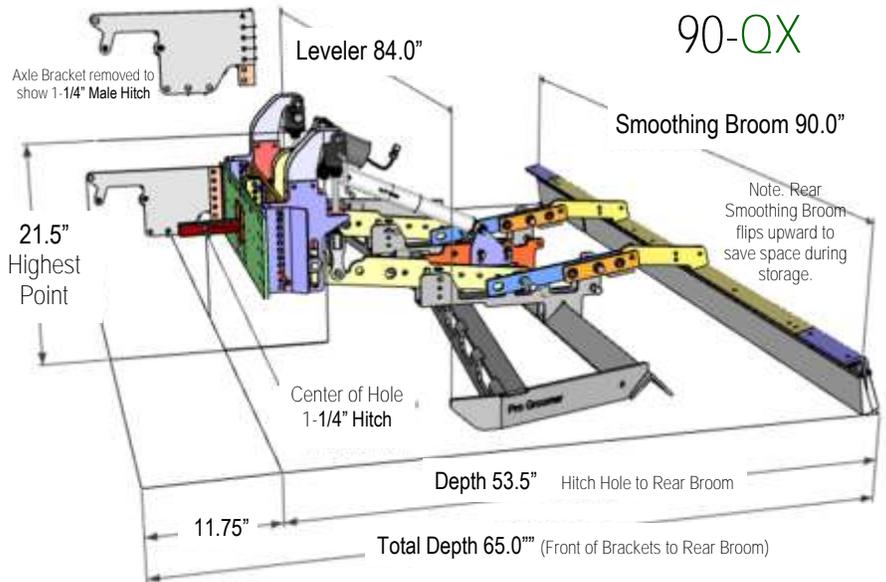

Size & Weight Specifications

PR90-TP 3 Pt. Lift Frame

Leveler 84.0" Wide
Rear Smoothing Broom 90.0" Wide
Height Adjustable 24.0" to 28.0"
Depth 48.0" (Broom also flips upward for storage).
Machine Weight 222 lbs. (Standard Equipment)
Pallet Size 42 x 92
Ship Weight 300 lbs. (Standard Equipment)

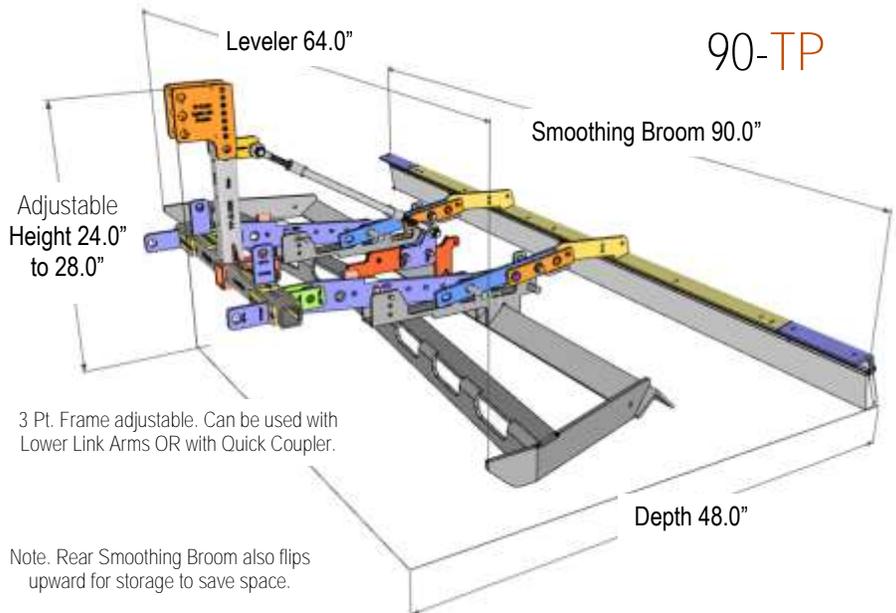

WARRANTY (All Groomers from Heying Company)

Heying Company machines carry the following limited warranty, from date of possession to the end user, on parts and workmanship, and to be free of defects, under normal and intended use and service conditions, of:

3 years parts and workmanship on Heying Company manufactured parts.

One (1) Year on parts not manufactured by Heying Company, including but not limited to:

Wheels, brushes, electrical cylinder (actuator), electric system parts, wireless remote control systems, switches, batteries, chargers, etc.

Excluded is this warranty is Normal Wear and Tear on Parts resulting from natural and intended use.

Heying Company's obligation under this warranty is limited to replacement or repair at the manufacturer's option.

Proof of purchase must accompany any and all warranty claims to Heying Company.

This warranty does not extend to any product or damage to a product caused by, or attributed to freight damage, abuse, misuse, improper or abnormal usage, improper storage or changes and repairs unauthorized by Heying Company including to towing machines.

All freight damage claims must be made immediately and directly to the freight carrier by the purchaser or end user. It is not the responsibility of Heying Company to report damaged freight to freight companies. We guarantee that all shipments leave our facilities free from damage.

Heying Company is not liable for direct or indirect, special or consequential damages arising from, or in connection with, the use or performance of the product or damages with respect to any economic loss, personal injury, loss or damage to property, loss of revenues or profits, or loss of enjoyment.

Any full machine, assembly or individual part returned to Heying Company for refund, replacement or repair must have sufficient proof of purchase included, prior written authorization from Heying Company, be packaged as instructed by Heying Company, and have all freight charges prepaid.

Product returns are subject to re-painting and re-stocking charges.

No other warranty beyond that specifically stated above is authorized or intended by Heying Company.

Choosing a tow machine is the sole responsibility of the user. User should always consult with the towing machine manufacturer for towing capacity and suitability. Heying Company makes no claim and carries no responsibility as to the ability or capacity of any towing machine to be used.

Acknowledgment and Assumption of Risk. Release of Liability; Indemnification.

Rear attach groomers are designed to attach directly to a customer's vehicle, tractor, etc. (and will not include a wheeled frame or tongue for pulling). The desire for direct attach groomers comes from customers needing "convenience". Even though these types of groomers could prove to be somewhat less effective there are customers who understand this and are willing to sacrifice some function to gain convenience. Examples of vehicles used for "direct attach groomers". Utility vehicles like the JD Gator TX. UTV's, Side by Sides, Small Tractors, etc. Heying Company is not responsible for damage or harm to vehicles, or to person's operating the vehicle and / or groomer. Customer agrees that they are solely responsible to attach to and operate their vehicle or Tow Machine, they understand they are responsible to assure the safety of operators, and that they willingly attach this groomer to their tow machine with full knowledge that they are responsible to make sure it will not cause damage to their vehicle or any person operating the vehicle. Customer acknowledges that by ordering a groomer they have read and understand all aspects of their responsibility of pulling, attaching, and operating all equipment.

Participant acknowledges that operating motorized vehicles and attached equipment can be an extreme test of a person's physical and mental limits and carries with it the potential for death, serious injury and property loss. The risks include, but are not limited to, those caused by terrain, vehicular traffic and the actions of other people including, facilities, temperature, weather, and physical and mental fitness. These risks are not only inherent to equipment operators but are also present for volunteers and anyone else desiring to participate in these activities. Participants acknowledge, agrees and represent that they will inspect the equipment to be used or operated by him/her and further agrees and warrants that, if at any time, he/she is in or about equipment will immediately advise appropriate officials of such and if necessary leave the area or equipment and/or refuse to further participate in these activities.

Release of Liability; Indemnification; Acknowledgement of Risk. Participant hereby waives, releases and discharges, on behalf of Participant and **Participant's executors, administrators, heirs, next of kin, successors and assigns, Heying Enterprises and authorized dealers,** and their respective **directors, officers, employees, volunteers, agents from any and all liability for customer's death, disability, personal injury,** property damage, property theft, lost income or any other losses, costs or actions of any kind whatsoever, which hereafter may directly or indirectly accrue to customer through training or participating in the act of use of Heying Equipment and their Tow Vehicles. Customer agrees to indemnify and hold the Releasees harmless **from and against any and all liability, loss, damage or injury as well as all costs and expenses (including attorneys' fees and costs of any suit related thereto),** suffered or incurred by Releasees, to the extent arising from any of customer actions whatsoever whether now or in the future, including but not limited to negligent, intentional or reckless misconduct, acts or omissions. Participant understands that there are inherent hazardous risks associated with the operation of equipment which could include serious injury or death, and customer freely assumes the risk of any and all injuries that customer may sustain while using this equipment. Customer agrees that no person with insufficient physical fitness, alertness, sobriety, vision, or medical ability shall operate the equipment and that all operators shall have adequate training before being allowed to operate said equipment.

Governing Law. Except to the extent that this Agreement may be governed by any federal law, this Agreement shall be governed by, construed and interpreted under, and enforced exclusively in accordance with the laws of the State of Iowa in the United States.

